





## MAJOR OPERATING CONTROLS

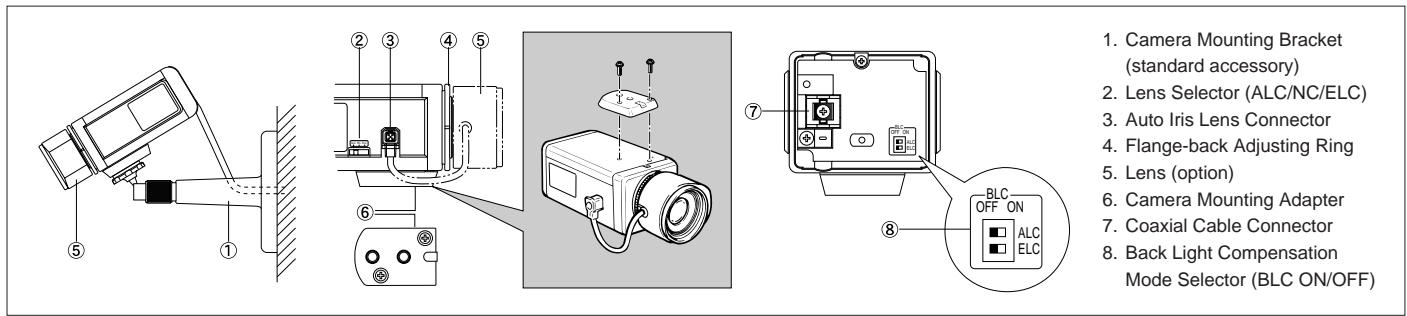

1. Camera Mounting Bracket (standard accessory)
2. Lens Selector (ALC/NC/ELC)
3. Auto Iris Lens Connector
4. Flange-back Adjusting Ring
5. Lens (option)
6. Camera Mounting Adapter
7. Coaxial Cable Connector
8. Back Light Compensation Mode Selector (BLC ON/OFF)

## SYSTEM EXAMPLES

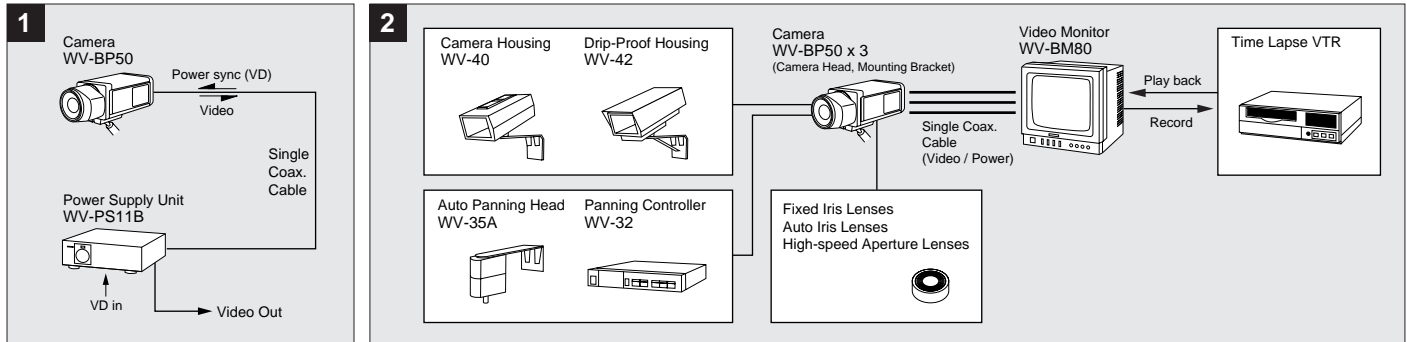


## OPTIONAL COMPONENTS & ACCESSORIES



## SPECIFICATIONS CCIR

<b>Pick-up Device</b>	512 (H) x 582 (V) pixels, interline transfer CCD
<b>Scanning Area</b>	4.8 (H) x 3.6 (V) mm (Equivalent to scanning area of 1/3" pick-up tube)
<b>Synchronization</b>	Multiplexed vertical drive (VD2)
<b>Scanning System</b>	2:1 interlace
<b>Scanning</b>	625 lines / 50 fields / 25 frames Horizontal: 15.625 kHz Vertical: 50 Hz
<b>Horizontal Resolution</b>	380 lines
<b>Video Output</b>	1.0 V [p-p] composite 75Ω / BNC connector
<b>Signal-to-Noise Ratio</b>	46 dB
<b>Electronic Light Control</b>	Equivalent to continuous variable shutter speed between 1/50 s and 1/80,000 s
<b>Minimum Illumination</b>	0.08 lx at F1.4, 0.04 lx at F0.75
<b>Ambient Operating Temperature</b>	-10°C - +50°C
<b>Ambient Operating Humidity</b>	Less than 90%
<b>Dimensions</b>	71 (W) x 65 (H) x 125.5 (D) mm (without lens)
<b>Weight (without lens)</b>	470 g

## APPEARANCE

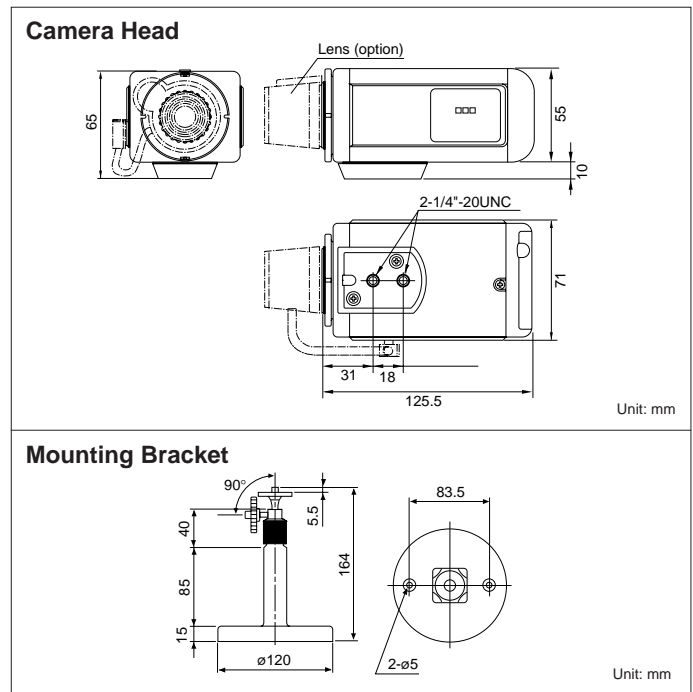

• Weights and dimensions are approximate. • Specifications are subject to change without notice. • These products may be subject to export control regulations.

DISTRIBUTED BY:

# Panasonic

Panasonic is the brandname of Matsushita Electric.  
Printed in Japan  
[2N-634A]